



HZI540PB Gas Insert

1-1/-(32mı

	I	i	
Model	HZI540PB-NG2	HZI540PB-LP2	
Fuel Type	Natural Gas	Propane	
Minimum Supply Pressure	5" W.C. (1.25 kPa)	11" W.C. (2.73 kPa)	
Manifold Pressure - High	3.5" W.C. (0.87 kPa)	10" W.C. (2.48 kPa)	
Manifold Pressure - Low	1.6" W.C. (0.41 kPa)	6.4" W.C. (1.59 kPa)	
Orifice Size -Altitude 0-4500 ft.	#32 DMS	#51 DMS	
Minimum Input Altitude 0-4500 ft. (0-1372m)	25,000 BTU/h (7.33 kW)	30,000 BTU/h (8.79 kW)	
Maximum Input Altitude 0-4500 ft. (0-1372m)	38,000 BTU/h (11.14 kW)	38,000 BTU/h (11.14 kW)	
Vent Sizing	3"x 4" Co-linear (Standard)	3"x 4" Co-linear (Standard)	

Approved Venting Systems				
Flex Vent Systems:	FPI AstroCap™ Flex Vent			

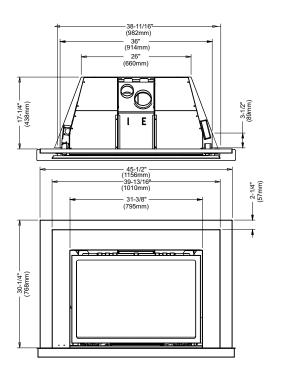






MINIMUM FIREPLACE DIMENSIONS

The minimum fireplace clearances & dimensions for the Regency gas insert are shown in the following diagrams:

	Max Lentil Bar Depth A	Height B	Overall Depth C	Width (rear) D	Width (front)* E	Front Depth (prior to taper) F	Width (front)* G
Low Profile Face- plate	10	24"	17-1/4"	26"	36"	3-1/2"	38-11/16"

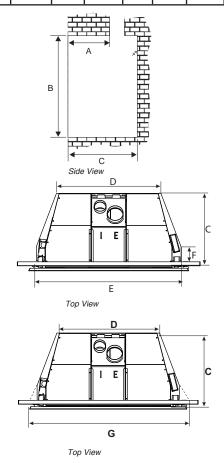



MINIMUM CLEARANCES TO COMBUSTIBLES

The clearances listed below are Minimum distances unless otherwise stated:

A major cause of fires is failure to maintain required clearances (air space) to combustible materials. It is of the greatest importance that this decorative gas appliance be installed only in accordance with these instructions.


Clearance:	Dimension	Measured From:
A: Sides	12" / 305 mm	From inside edge of faceplate / doors
B: Ceiling	60" / 1524 mm	Bottom of unit
C: Mantel (Min. Height)*	*12" / 305mm 16"/ 406mm	From top of unit, or 36" from bottom of unit From top of unit, or 40" from bottom of unit
D: Min. Hearth Depth	14" / 356mm	
E: Min. Hearth Width	44"/ 1016mm	
G: Max. Mantle Depth	12" / 305 mm	@ 48" (1219mm) from bottom of unit
K: Min. Alcove Width	56" / 1422 mm	
L: Max. Alcove Depth	36" / 914 mm	
M: Optional mantel deflector	3-1/2" / 89mm	

Notes: Non-combustible hearth required. If unit is raised 6" from the floor - no hearth is required.

Otherwise:

Min. Hearth requirements - An R value of 1.75 is required to meet the requirements of the hearth in front of this appliance. 1" of Calcium Silicate board available from Regency, part number (296-936) plus 3/8" tile or equivalent would meet this requirement.

See part instruction sheet 919-133 for non-combustible Calcium Silicate board requirements.



MANTEL CLEARANCES WITHOUT DEFLECTOR


Allowable 38 Mantel Area **- 36 - 34** 32 30 **— 28** — 26 **— 24 — 22 — 20 — 18 — 16** 16" Min From Top of Door Opening 40" From bottom of unit

WARNING

Diagram 2

Although this appliance passes safety certification, the hearth in front of the fireplace becomes very hot when the fireplace heats. Do not use the hearth as a seat or shelf.

MANTEL CLEARANCES WITH 3-1/2" DEFLECTOR

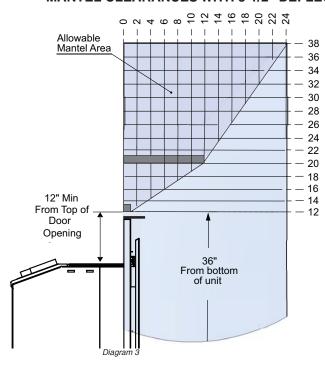

Note: A 3-1/2" mantel deflector to reduce mantel height to 36" from bottom of unit @ 1"depth.

A noncombustible mantel may be installed at a lower height if the framing is made of metal studs covered with a noncombustible board.