



GF55 Greenfire Pellet Stove



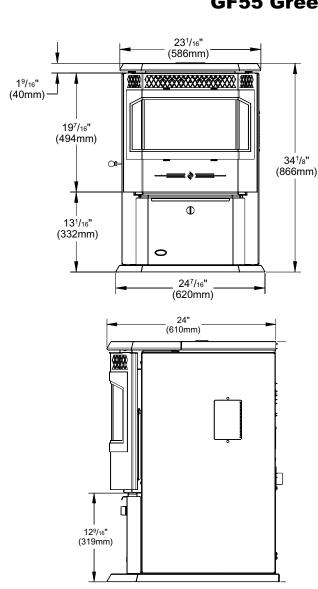

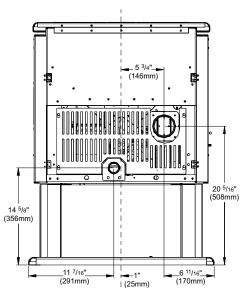


CLEARANCES TO COMBUSTIBLES


These dimensions are minimum clearances to combustibles, however it is highly recommended that you leave sufficient room on each side (20" where possible) for servicing, routine cleaning and maintenance.

This pellet stove requires floor protection. The floor protection must be non-combustible, extending 6" (150mm) beyond the full width and depth of the unit including 6" (150 mm) in front for ember protection.

Floor Protection:

Width 36-7/16" (934mm) Depth 36" (914mm)




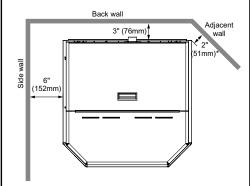

*NOTE: If the unit is installed as a corner installation, clearances change from 2" to 3", see "Corner thru Wall Installation" section.



ALCOVE CLEARANCES

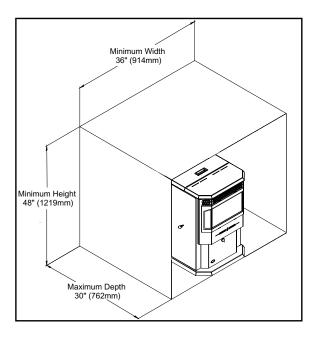


MOBILE HOME INSTALLATION

- Secure the heater to the floor using the holes in the pedestal of the appliance.
- Ensure the unit is electrically grounded to the chassis of your home (permanently).

WARNING: Do not install in a room people sleep in.

<u>CAUTION</u>: The structural integrity of the manufactured home floor, wall and ceiling/roof must be maintained


• Outside fresh air is mandatory. Secure outside air connections directly to fresh air intake pipe and secure with three (3) screws evenly spaced.

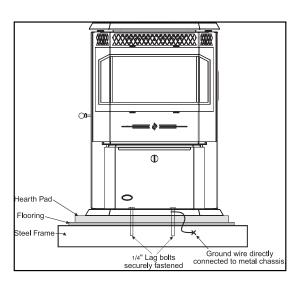

EXHAUST AND FRESH AIR INTAKE LOCATION

EXHAUST:		
Base of unit to center of flue	20-5/16" (508mm)	
Side of unit to center of flue	6-11/16" (170mm)	
Center of unit to center of flue	5-3/4" (146mm)	
FRESH AIR INTAKE:		
Base of unit to center of intake	14-5/8" (356mm)	
Side of unit to center of intake	11-7/16" (291mm)	
Center of unit to center of intake	1" (25mm)	

INSTALL VENT AT CLEARANCES SPECIFIED BY THE VENTING MANUFACTURER.

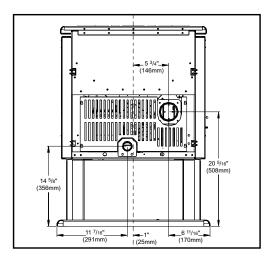


OUTSIDE FRESH AIR CONNECTION

Outside fresh air is mandatory when installing this unit in airtight homes and mobile homes.

A Fresh-air intake is strongly recommended for all installations.

Failure to install intake air may result in improper combustion as well as the unit smoking during power failures.


When connecting to an outside fresh air source, do not use plastic or combustible pipe. A 2" minimum (51 mm) ID (inside diameter) steel, aluminum or copper pipe should be used. It is recommended, when you are installing a fresh air system, to keep the number of bends in the pipe to a minimum.





VENT TERMINATION REQUIREMENTS

Letter	Minimum Clearance	Description
Α	24 in (61 cm)	Above grass, top of plants, wood, or any other combustible materials.
В	48 in (122 cm)	From beside/below any door or window that may be opened.
С	24 in (61 cm)	From above any door or window that may be opened.
D	24 in (61 cm)	To any adjacent building, fences and protruding parts of the structure.
Е	24 in (61 cm)	Below any eave or roof overhang
F	12 in (30 cm)	To outside corner.
G	12 in (30 cm)	To inside corner, combustible wall (vertical and horizontal terminations).
Н	3 ft (91 cm) within a height of 15 ft (4.5 m) above the meter/regulator assembly	To each side of center line extended above natural gas or propane meter/ regulator assembly or mechanical vent.
I	3 ft (91 cm)	From any forced air intake of other appliance
J	12 in (30 cm)	Clearance to non-mechanical air supply inlet to building, or the combustion air inlet to any appliance.
К	24 in (61 cm)	Clearance above roof line for vertical terminations.
L	7 ft (2.13 m)	Clearance above paved sidewalk or paved driveway located on public property.

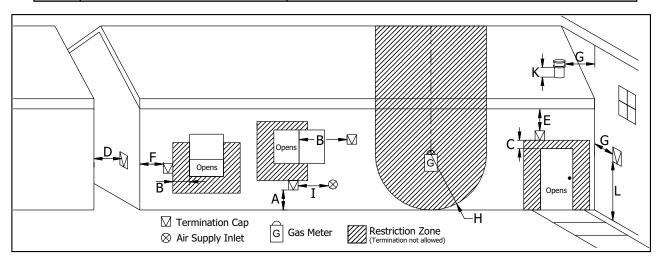


- 1. Do not terminate the vent in any enclosed or semi-enclosed areas such as a carport, garage, attic, crawlspace, narrow walkway, closely fenced area, under a sundeck or porch, or any location that can build up a concentration of fumes such as stairwells, covered breezeway, etc.
- 2. Vent surfaces can become hot enough to cause burns if touched by children. Non-combustible shielding or guards may be required.
- 3. Termination must exhaust above the inlet elevation. It is recommended that at least five feet of vertical pipe be installed outside when the appliance is vented directly through a wall, to create some natural draft to prevent the possibility of smoke or odor during appliance shut down or power failure. This will keep exhaust from causing a nuisance or hazard from exposing people or shrubs to high temperatures. In any case, the safest and preferred venting method is to extend the vent through the roof vertically.
- 4. Distance from the bottom of the termination and grade is 12" (30 cm) minimum. This is conditional upon the plants and nature of grade surface. The exhaust gases are hot enough to ignite grass, plants and shrubs located in the vicinity of termination. The grade surface must not be lawn.
- If the unit is incorrectly vented or the air to fuel mixture is out of balance, a slight discoloration of the exterior of the house might occur. Since these factors are beyond the control of FPI, we grant no guarantee against such incidents.

NOTE: Venting terminals shall not be recessed into walls or siding.





CORNER THROUGH WALL INSTALLATION

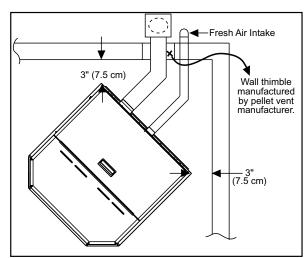

HORIZONTAL EXHAUST THROUGH WALL INSTALLATION


A chimney connector shall not pass through an attic or roof space, closet or similar concealed spaces, or a floor, or ceiling. Where passage through a wall or partition of combustible construction is desired, the installation shall conform to CAN/CSA-B365 Installation Code for Solid-Fuel-Burning Appliances and Equipment. Only use venting of L or PL type with an inside diameter of 3 or 4 inches (7.6 or 10.1 cm).

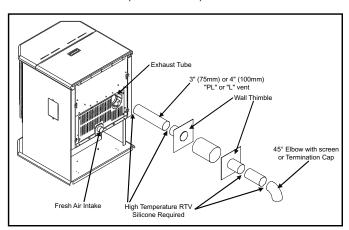

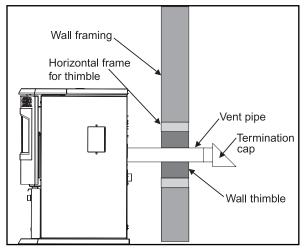

VERTICAL RISE WITH HORIZONTAL TERMINATION INSTALLATION

A 45° elbow with a rodent screen may be used in place of the termination cap (or stainless steel termination hood).

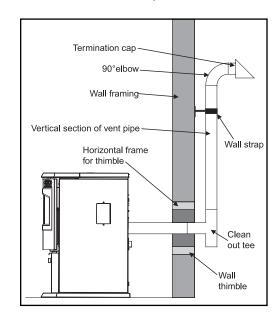


THROUGH CONCRETE WALL WITH VERTICAL RISE INSTALLATION

A 45° elbow with a rodent screen may be used in place of the termination cap (or stainless steel termination hood).


This is the recommended installation to use if there is a concrete or retaining wall in line with exhaust vent on pellet stove.

The termination must be 12 inches (30 cm) from the outside wall and 12 inches (30 cm) above the ground.

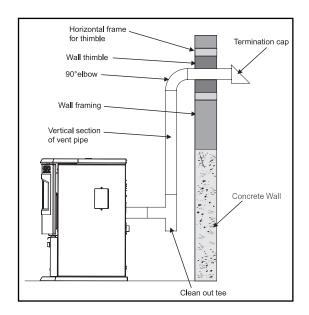




INSIDE VERTICAL INSTALLATIONS

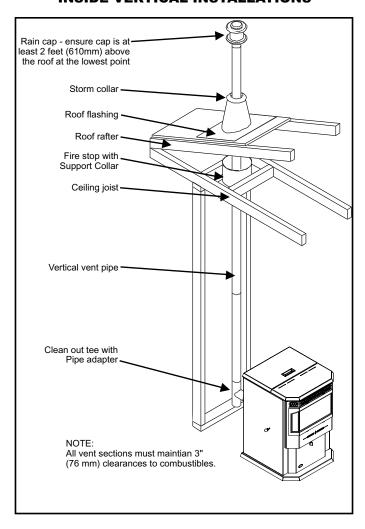

HEARTH MOUNT INSTALLATION

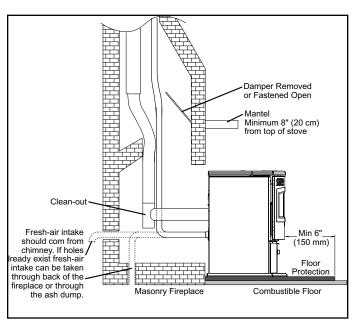

OUTSIDE VERTICAL INSTALLATIONS

